


COMMERCIAL BOLTS & NUTS

DIN 605

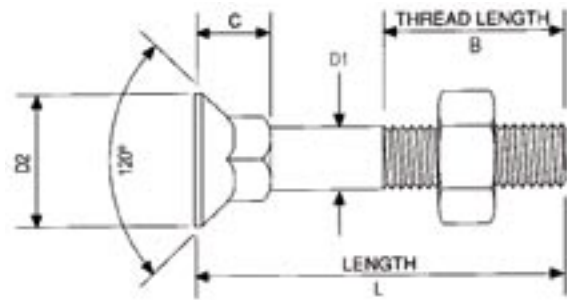

1.5 COUNTERSUNK SQUARE NECK BOLTS (PLOUGH BOLTS) DIN 605 / 555 SABS 1355

D 1	M6	M8	M10	M12	M16	M20
B 2	18	22	26	30	38	46
B 3	24	28	32	36	44	52
C	7	9	11	14	17	22
D	16	20	24	28	38	44
L	Mass with nut in Kg per 1000 units					
30	11.10	20.20				
35	12.10	22.20				
40	13.10	24.10	41.60			
45	14.20	26.10	44.60			
50	15.20	28.00	47.50	72.80		
55	16.20	30.00	50.40	77.30		
60	17.20	31.90	53.40	81.80		
65		33.90	56.30	85.30	145.00	270.00
70		35.80	59.20	89.80	153.00	282.00
75		37.80	62.10	94.30	161.00	295.00
80		39.70	65.00	98.80	169.00	307.00
90			70.80	107.00	185.00	332.00
100			76.60	116.00	200.00	357.00
110				125.00	216.00	382.00
120				134.00	232.00	407.00
130				143.00	248.00	432.00
140				152.00	266.00	457.00
150				161.00	282.00	482.00
160				170.00	298.00	507.00
Nut Mass	2.32	4.82	10.90	15.90	30.80	60.30

Grades: 4.6 / 4.8 / 8.8 / 10.9 / 12.9

B2 For length up to 120mm

B3 For length above 120mm